



HV & UHV Vacuum Products Catalogue

- ▶ **COMPONENTS**
- ▶ **CONSUMABLES**
- ▶ VALVES
- ▶ PUMPS
- ▶ GAUGES
- ▶ MANIPULATION

- ▶ MASS FLOW
- ▶ FEEDTHROUGHS
- ▶ CHAMBERS
- ▶ ASSEMBLIES
- ▶ MATERIALS
- ▶ SYSTEMS

CF Flanges and Components

- CF to ISO-K Adaptors

CONTENTS




CF to ISO-K Adaptors

Page

A51 CF to ISO-K Adaptor. Straight. 304L



CF to ISO-K Adaptors | Straight

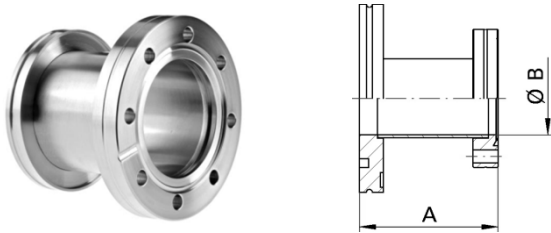

- Standard material SS 304L ...also available in SS 316L and Al
- Temperature range: -195 to 300°C ...200°C; Al. 350°C; 316L
- Custom lengths and flange, inc. F-style, variations manufactured by request
- Full range of ISO centering rings, O-rings, clamps, CF gaskets and bolt sets in-stock

NW/DN	A dimension	B dimension	Part Code
ISO63-K/CF16	60.0	16.0	ISO63KCF16TRA
ISO63-K/CF35	70.0	37.0	ISO63KCF35TRA
ISO63-K/CF63	90.0	66.0	ISO63KCF63TRA
ISO100-K/CF100	90.0	102.0	ISO100KCF100TRA
ISO160-K/CF150	100.0	153.0	ISO160KCF150TRA

all dimensions are measured in millimetres (mm) unless otherwise stated

Centering Rings & O-rings and Clamps

NW	Type	Part Code
ISO63	SS/VITON*	ISO63CRVSS
ISO100	SS/VITON*	ISO100CRVSS
ISO160	SS/VITON*	ISO160CRVSS

*Fluorocarbon (temp range -15 to 150°C). Other Centering/O-ring materials available

ISO63-100-K	Aluminium	ISO63/100DCCAL
ISO160-250-K	Aluminium	ISO160/250DCCAL

other clamp materials and styles available

OFHC Copper Gaskets

SIZE	Material	Pack	Part Code
CF16	OFHC	10	CF16GCU
CF35	OFHC	10	CF35GCU
CF63	OFHC	10	CF63GCU
CF100	OFHC	10	CF100GCU
CF150	OFHC	10	CF150GCU

other gasket materials incl. annealed and plated also available

Hex Head Bolt Sets

SIZE	Material	Pack	Part Code
CF16	SS	25	HEX16BOLT
CF35	SS	25	HEX35BOLT
CF63	SS	25	HEX63BOLT
CF100	SS	25	HEX100BOLT
CF150	SS	25	HEX150BOLT

sets comprise bolts, washers and nuts
cap screw bolts, vented and plate-nut sets available



Contact us...



k-tech supplies ltd
wild thyme
udimore road
broadland row
broad oak
rye
east sussex
tn31 6bx
united kingdom

web : www.ktechsupplies.co.uk
email : enquiries@ktechsupplies.co.uk
tel : +44 (0)1424 400 235
fax : +44 (0)7006 044 223