



HV & UHV Vacuum Products Catalogue

- ▶ **COMPONENTS**
- ▶ **CONSUMABLES**
- ▶ VALVES
- ▶ PUMPS
- ▶ GAUGES
- ▶ MANIPULATION

- ▶ MASS FLOW
- ▶ FEEDTHROUGHS
- ▶ CHAMBERS
- ▶ ASSEMBLIES
- ▶ MATERIALS
- ▶ SYSTEMS

ISO Flanges and Components

- Tees



ISO Tees


Page

C13	ISO-K. Tee. Equal. 304L
C14	ISO-K. Tee. Unequal. 304L

CONTENTS



ISO-K Tees | Equal

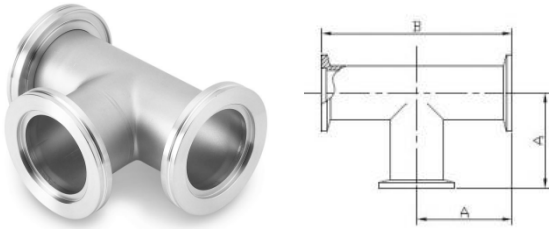

- Standard material SS 304L ...also available in 316L and Al
- Temperature range: -195 to 300°C ...200°C; Al. 350°C; 316L
- Other flange size options, including ISO-F, manufactured by request
- Full range of centering rings, O-rings and clamps in-stock

NW	A dimension	B dimension	Tube ID	Part Code
ISO63-K	83.0	166.0	70.0	ISO63KTEE
ISO80-K	89.0	178.0	95.0	ISO80KTEE
ISO100-K	105.0	210	99.0	ISO100KTEE
ISO160-K	133.0	266.0	149.0	ISO160KTEE
ISO200-K	184.0	368.0	197.0	ISO200KTEE
ISO250-K	247.0	494.0	248.0	ISO250KTEE

all dimensions are measured in millimetres (mm) unless otherwise stated

Centering Rings & O-rings and Clamps


NW	Type	Part Code
ISO63	SS/VITON*	ISO63CRVSS
ISO80	SS/VITON*	ISO80CRVSS
ISO100	SS/VITON*	ISO100CRVSS
ISO160	SS/VITON*	ISO160CRVSS
ISO200	SS/VITON*	ISO200CRVSS
ISO250	SS/VITON*	ISO250CRVSS

*Fluorocarbon (temp range -15 to 150°C). Other Centering/O-ring materials available

ISO63-100-K	Aluminium	ISO63/100DCCAL
ISO160-250-K	Aluminium	ISO160/250DCCAL

other clamp materials and styles available

ISO-K Tees | UnEqual

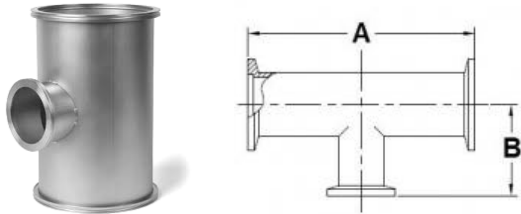

- Standard material SS 304L ...also available in 316L and Al
- Temperature range: -195 to 300°C ...200°C; Al. 350°C; 316L
- Other flange size options and custom lengths, including ISO-F, manufactured by request
- Full range of centering rings, O-rings and clamps in-stock

NW	A dimension	B dimension	Tube ID	Part Code
ISO100-63-K	216.0	107.0	102/70	ISO100K63TEE
ISO160-63-K	276.0	130.0	153/70	ISO160K63TEE
ISO160-100-K	276.0	131.0	153/102	ISO160K100TEE

all dimensions are measured in millimetres (mm) unless otherwise stated

Centering Rings & O-rings and Clamps

NW	Type	Part Code
ISO63	SS/VITON*	ISO63CRVSS
ISO100	SS/VITON*	ISO100CRVSS
ISO160	SS/VITON*	ISO160CRVSS

*Fluorocarbon (temp range -15 to 150°C). Other Centering/O-ring materials available

ISO63-100-K	Aluminium	ISO63/100DCCAL
ISO160-250-K	Aluminium	ISO160/250DCCAL

other clamp materials and styles available



Contact us...



k-tech supplies ltd
wild thyme
udimore road
broadland row
broad oak
rye
east sussex
tn31 6bx
united kingdom

web : www.ktechsupplies.co.uk
email : enquiries@ktechsupplies.co.uk
tel : +44 (0)1424 400 235
fax : +44 (0)7006 044 223